



FITTING INSTRUCTIONS - Floor Graphic Discs

Unroll the floor graphic in a warm room & let graphic warm up to room temperature prior to application


Ambient temperature range for fitting is recommend to be 15°C - 25°C. Most vinyl graphic adhesives work better and form a stronger bond when warm. If working in cold conditions below 10°C, the gentle use of a hot air gun on the graphic, as it is applied, is recommended (Heat Gun on a low 100°C - 150°C setting). If the vinyl or floor is particularly cold, the adhesive will be slow to tack and require longer to form a proper bond. All vinyl graphic adhesives will cure over a period of 24 hours until full adhesion has been obtained. Avoid walking on, driving on, washing, cleaning or otherwise disturbing the graphic for a 24 - 48 hour period if possible.

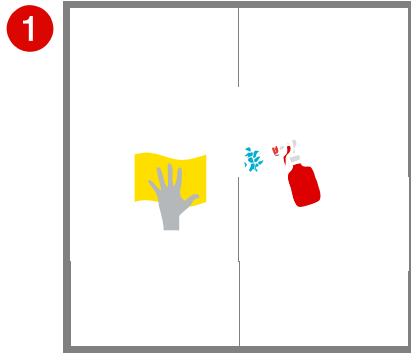


Please clean the floor first prior to fitting graphic! It is vital the floor is clean. Use floor detergent or any solvent based cleaner that does not contain silicone, polish or oil additives. Next, degrease desired floor graphic application area with isopropyl alcohol, white spirit or similar, using a paper towel or lint free cloth.

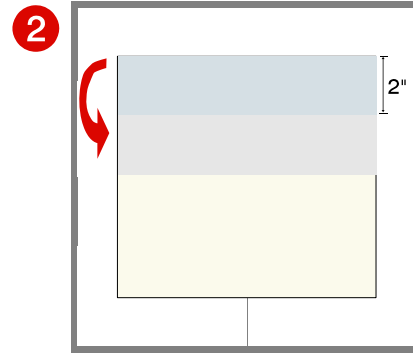

Turn the graphic over and place on a flat surface. Peel back 2" / 50mm of the backing paper back on itself (180 degrees), along the top edge of the graphic and put a tight fold in the paper (while avoiding touching the adhesive on the rear with your fingers).

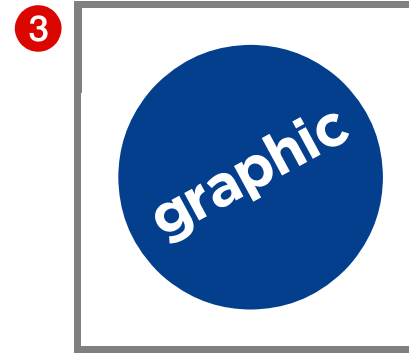


Turn the graphic back over and align on the cleaned area of the floor, ensuring none of the graphics edges start or finish on the edge of a floor tile.

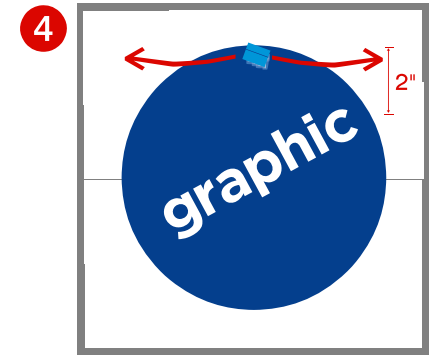


Once satisfied with graphic location, apply (rub down) the exposed 2" strip of the graphic, from the vertical centre-line to the left & right sides using the blue plastic squeegee provided in overlapping strokes. This 2" strip along the top edge of the floor graphic will now act as a "hinge", securing the graphic in place.


Fitting Tip: Have a pair of scissors handy to trim away the excess backing paper every two 6" sections of applied graphic.

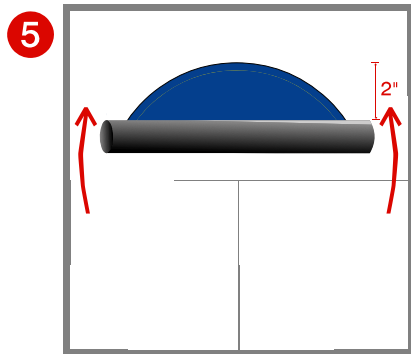

Now roll the graphic from the bottom edge into a roll of approx 4" / 100mm diameter, up towards the top of the graphic and the 2" hinge just applied to the floor.

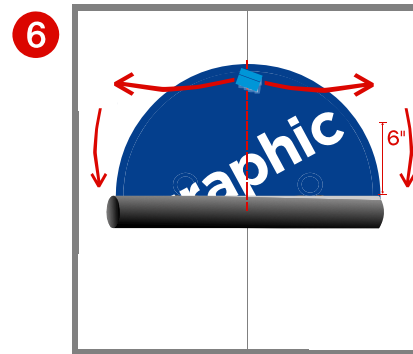

Kneel on the floor with the roll resting against your knees. Lifting the rolled graphic, gently peel back 6" / 150mm of backing paper and put a light fold in the backing paper. Now lower the rolled graphic back towards the floor until the newly exposed 6" of graphic is just above the floor's surface, while keeping tension in the exposed section of graphic to prevent it touching the floor prematurely. As before, apply the graphic from the vertical centre line out to the left and right sides using the blue plastic squeegee in overlapping strokes. Once this section of graphic has been applied, repeat the process of removing 6" of backing paper at a time and unrolling the graphic as you go, applying the next 6" graphic section until the whole graphic has been applied to the floor.

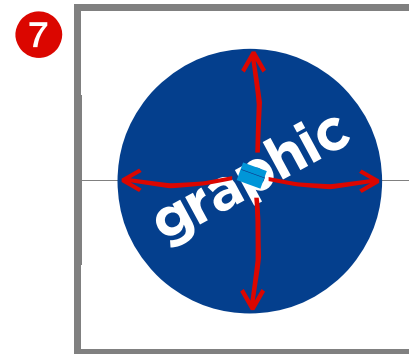

Lastly, rub back over the entire floor graphic once again with the blue squeegee paying extra attention to the edges, ensuring they are firmly applied to the floor. Should there be any trapped air bubbles under the graphic, they can be removed by simply pricking them with a needle or scalpel at one side of the bubble & working the air out using the blue squeegee towards the prick in the bubble.

Remember, the adhesive for any vinyl graphic will only stick properly if the surface is clean and the film is applied correctly.

The floor graphic can be easily cleaned and has an excellent slip and wear resistance during its functional life. Short term exposure to water, cleaning agents, IPA (Isopropyl alcohol), diluted acetic acid, salt spray when used on indoor floors, will not damage the surface. Do not use very aggressive floor cleaning agents.

Any floor surface, including those with floor graphics, that is wet due to rain, snow, or other contaminants may become slippery.

To avoid personal injury due to slipping:

- Place the floor graphic far enough away from entryways to keep the graphic dry.
- Use doormats to reduce moisture at entryways.
- Clean up water, spills, or other contaminants immediately.

Removal of floor graphic:

Removal of the floor graphic will be achieved without the use of heat, however the use of a heat gun on a low temperature setting may well speed up removal if desired.